


OKUR™

OS12MB 12" Mid-Bass | 800 W

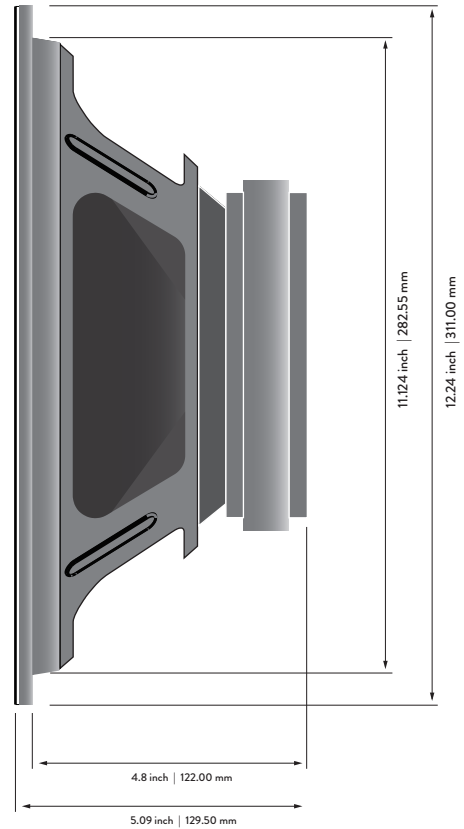

Specifications

Size	12"
Impedance:	4 Ohms
Nominal Power:	400 Watts
Dynamic Power:	800 WATTS
Resonance:	59.7 Hz
Sensitivity:	94.8 dB
Voice Coil Diameter:	2.5"
Sold As	Single

Driver Composition

Voice Coil Wire:	CCAW
Magnet:	Ferrite
Basket:	Stamped Steel
Cone:	Paper
Cone Edge:	Cloth


T/S Parameters

Resonant Frequency (fs):	59.7
DC Resistance (RE):	3.2
Coil Inductance (LE):	0.45mH
Mechanical Q (Qms):	8.23
Electromagnetic Q (QES):	0.57
Total Q (QTS):	0.53
Compliance Equivalent volume (VAS):	53.1
Mechanical Compliance of Suspension (CMS):	0.13
BL Product (BL):	10.6 N/A
Diaphragm Mass Inc. Airload (Mms):	52.7 gr

Mounting Information


Overall Diameter:	311mm 12.24 inch
Cutout diameter:	282.55mm 11.12 inch
Mounting Depth:	122mm 4.8 inch

OS12MB Frequency Response

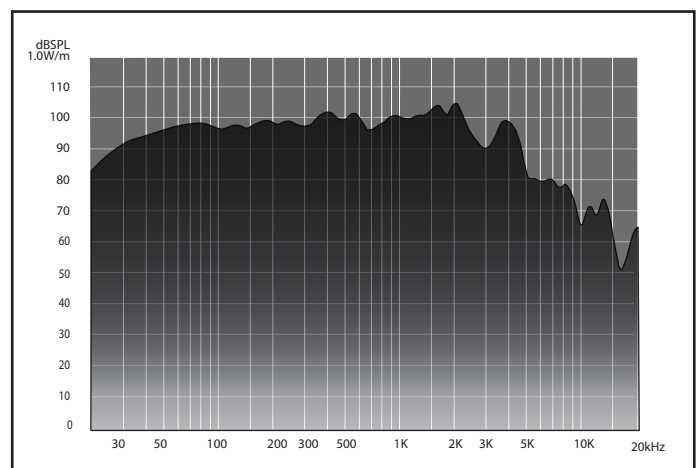

OKUR™

OS12MB 12" Mid-Bass | 800 W

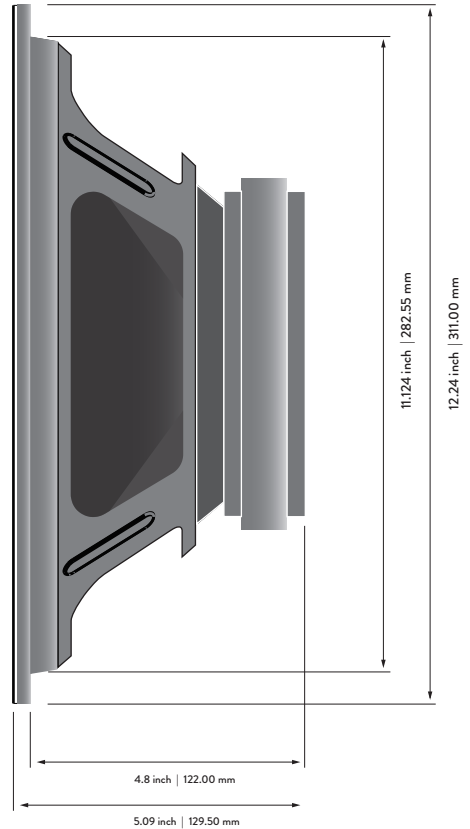

□ Especificaciones

Diámetro Nominal de la Canasta:	12"
Impedancia de Trabajo:	4 Ohms
Nominal Power:	400 Watts
Dynamic Power:	800 WATTS
Resonancia:	59.7 Hz
Sensibilidad:	94.8 dB
Diámetro de la Bobina:	2.5"
Se vende :	Individual

□ Composicion del Parlante

Tipo de Cable de la Bobina:	CCAW
Iman:	Ferrite
Tipo de Canasta:	Stamped Steel
Material de Cono:	Paper
Borde del Cono:	Cloth

□ Parametros T/S

Frecuencia de Resonancia (Fs):	59.7
Resistencia DC (Re):	3.2
Inductancia de la bobina (LE):	0.45mH
Factor Q Mecánico (Qms):	8.23
Electromagnetico Q (QES):	0.57
Total Q (QTS):	0.53
Volumen Equivalente (VAS):	53.1
Cumplimiento Mecanico de Suspension (CMS):	0.13
BL del Producto (BL):	10.6 N/A
Diaphragm Mass Inc. Airload (Mms):	52.7 gr

□ Mounting Information

Diámetro Total:	311mm 12.24 inch
Diámetro de Corte:	282.55mm 11.12 inch
Profundidad de montaje:	122mm 4.8 inch

OS12MB Frequency Response

